



FIE Dealer | Accredited By NABL

Call: 9970 600 965

Email: genesissengineers@gmail.com

Visit: www.genesissengineers.com

Universal Testing Machine

GENESS ENGINEERS

Model - UNITEK – 97050 α



Technical Description :

"FIE" Universal Testing Series UNITEK-97000 are microprocessor based electro-mechanical machines with servo drive designed for testing & studying mechanical behavior of various materials like metals, polymers etc. These machines offer good built-in features so offer excellent stand alone performance for standard tests & great flexibility for complex analysis.

These machines confirm to IS, BS & ASTM standards.

Features :

- Precision AC servo motor & drive with ball lead screw gives an advanced drive system with 0.5 to 350 standard speed range.
- PLC & HMI based system to measure store load & displacement values.
- Provision for load cell interchangeability & thereby automatic selection of load full scale.
- Speed selection through data entry or variable speed through potentiometer.
- Facility for mounting different load cells & clamping devices to suit various tests & materials like thin wires, metal sheets, fiber glass, leather, spring, card boards etc.
- Safety interlock for overload & limit switch sensing to ensure protection during test.
- Universal applications in R & D, Education, Quality control and Production for tests like Tensile, Compression, Bending etc.

Optional Accessories :

'FIE' offers a wide range of optional accessories along with Unitek-9700 Machines to cover almost every material test requirements.

Load Cells :

'FIE' offers Strain gauge type Universal load cell indifferent capacities in the following nominal ranges :

100 N, 250 N, 1 kN, 2.5 kN, 5 kN load cell as per customers requirements.

Grip & Clamping Devices :

A wide range of grips are available from 'FIE' such as :

- Wedge type grips
- Vice type grips
- Single threaded grips
- Compression plates
- Bending fixtures
- Shearing attachments

Extensometers :

Electronic extensometers are offered with extension on the touch screen to measure with resolution of 1 micron.

Model : EE2.

Touch Screen Control Panel :


PLC based panel incorporating following features :

- Front panel 7" Touch Screen
- Data entry of test parameters (like speeds, rupture %, pre-load, test data & specimen data) with touch screen
- Data storage ranges as: at input, at output; during power off
- Optional remote to ease specimen loading/unloading
- RS 232, USB & Ethernet ports for communication.
- The data will be stored in JPG format & accessible for external system with USB drive storage.

USB port for printer or USB drive interface for :


- Graph & result print-out
- Test certificate print-out
- Simple statistics print-out
- RS 232 interface for data transfer to desktop.
- Ethernet port for network printer access.
- Facility to export X, Y points in .csv format.
- Facility to export batch results in .csv format.

Built – In Electronic Control Panel

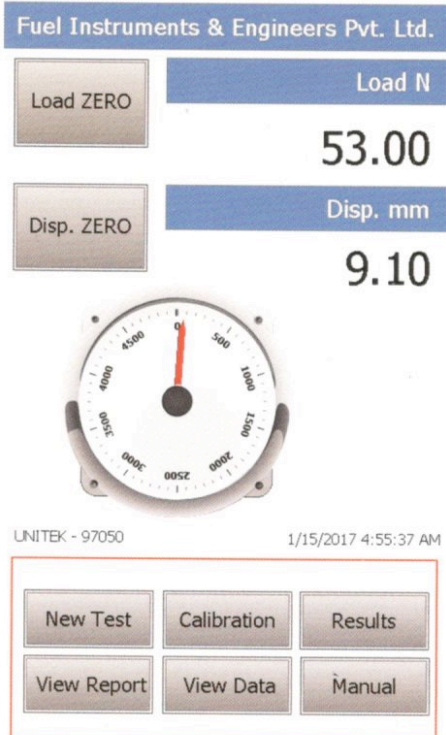

Home Screen


Screen Display for Test

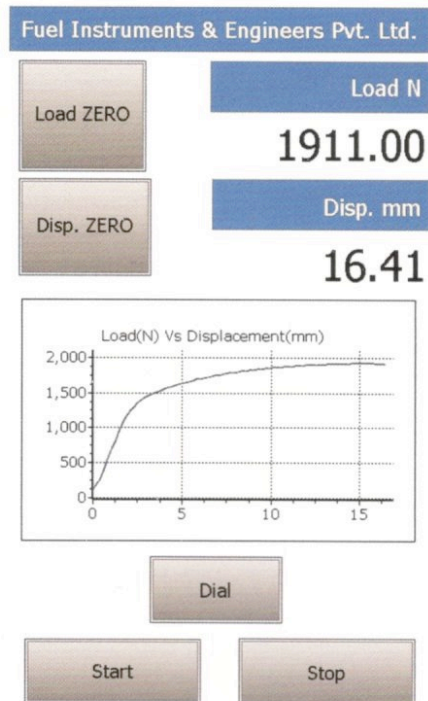

Real time Graph with load & displacement



Test Result Display

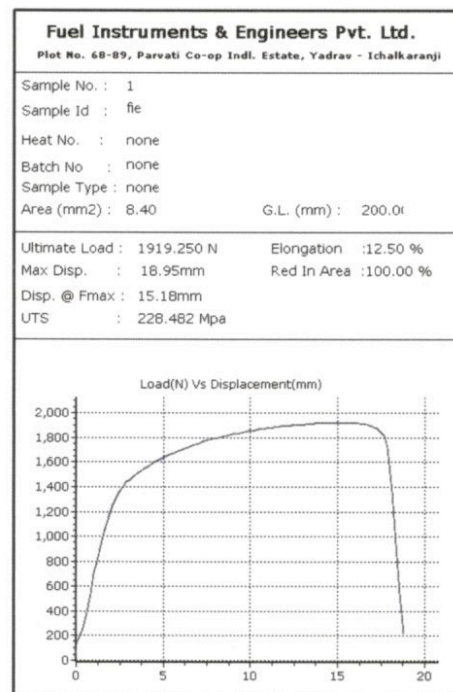

Test Report with Graph

MODEL	UNITEK-97050	UNITS
Load Range	0-5	kN
Load Resolution	1/20000 of Nominal Load Cell Connected	----
Load Measuring Accuracy	± 1% from 2% to 100% of Nominal load of load cell used	----
Max Crosshead Stroke	900 (without grips & load cell)	mm
Crosshead displacement measurement	0.01	mm
Crosshead speed range	0.5-350	mm/min
Power Supply	230 VAC, 50 Hz Single Phase	----

Due to constant Research & Development, Specifications and Features are subject to change without notice.